




LEAD THE CHANGE
WITH 4228RT (10×4)

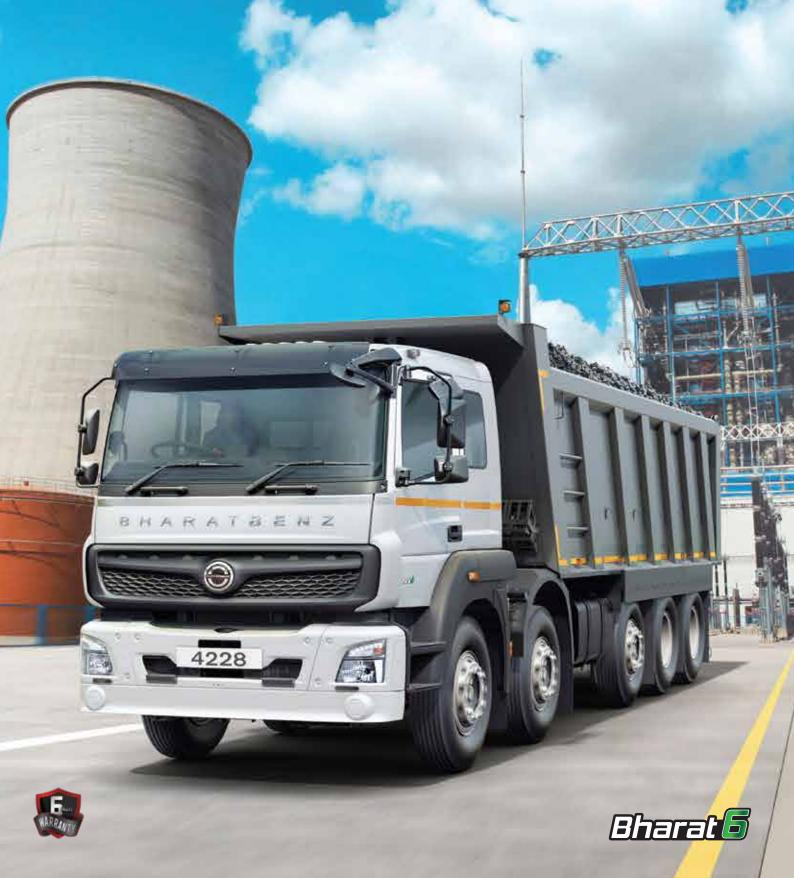

Technical	Specifications	4228RT (10X4)
N	<b>M</b> odel	4228RT
C	Configuration	10x4
G	GVW (Kgs)	42000
E	ingine	0M 926, 7.2L BS6
P	Power	281hp @ 2200rpm
Т	orque	1100 Nm @ 1200 1600rpm
C	Clutch	395mm Dia, Single plate, Dry type
G	Searbox	9F + 1R
R	Rear Axle	IRT390
R	Rear Axle Ratio	4.778
F	rame (L x W x T) (mm)	284 × 70 × 8
F	ront Suspension	Parabolic
R	Rear Suspension	Balancer
Е	Brakes	Fully air S-cam, Dual Circuit
F	ront, Rear &Pusher axle brake (mm)	410x180 drum,410x220 drum,410x180 drum
Е	Battery	2 x 12V, 120 Ah
F	uel Tank (L)	330
Т	yre Size	Radial (tube) - 295/90R20 (S), 11x20 (O)
W	vheel base (mm)	6575
R	Running Gradeability (%)	32.30
N	/lin TCD (m)	24
G	Ground clearance (mm)	247
K	Kerb weight (Kgs)	10750
L	oading Span (ft)	23

Spline

60

PTO type

Max Speed(kmph)